

KT055+

ExpressDry+ Drying Tumbler

ARCHITECTURAL/MECHANICAL
PRODUCT SPECIFICATIONS

ExpressDry+

Inverter Drive

PRODUCT SPECS


| | |
|--|----------------|
| Capacity <i>lbs</i> | up to 65 |
| Cylinder Diameter <i>inch</i> | 33 |
| Cylinder Depth <i>inch</i> | 35 |
| Cylinder Volume <i>cu ft</i> | 17.3 |
| Net Weight <i>lbs</i> | 435 |
| Crated Weight <i>lbs</i> | 476 |
| Machine Width <i>inch</i> | 34.5 |
| Machine Depth <i>inch</i> | 53.62 |
| Machine Height <i>inch</i> | 66.72 |
| Door Opening <i>inch</i> | 26.89 |
| Floor to Door <i>inch</i> | 26.87 |
| Shipping Dimensions <i>inch</i> WxDxH | 35.5 x 59 x 72 |
| Exhaust Diameter <i>inch</i> | 8 |
| Exhaust Air Flow <i>cfm</i> | 700 |
| Exhaust Back Pressure (max) <i>WCI</i> | .6 |
| Required Makeup Air <i>sq in</i> | 144 |
| Electric Heating <i>kW</i> | 27 |
| Gas Connection <i>inch</i> | 1/2 NPT |
| Gas Heating <i>BTU/h</i> | 112,000 |
| Gas Pressure (max/recommended/min) | |
| Natural Gas <i>wc</i> | 10.5 / 6.5 / 5 |
| Propane <i>wc</i> | 13 / 11 / 10 |

GAS MODELS

| AVAILABLE VOLTAGES | WIRE CONDUCTOR | FULL LOAD AMPS | RECOMMENDED BREAKER SIZE |
|--------------------|----------------|----------------|--------------------------|
| 100-120/50-60/1 | 1W+N+G | 12 | 15 |
| 200-240/50-60/1 | 2W+G | 7 | 15 |
| 380-415/50-60/3 | 3W+G | 3 | 15 |
| 440-480/50-60/3 | 3W+G | 3 | 15 |

ELECTRIC MODELS - CLASSIC 27 kW

| AVAILABLE VOLTAGES | WIRE CONDUCTOR | FULL LOAD AMPS | RECOMMENDED BREAKER SIZE |
|--------------------|----------------|----------------|--------------------------|
| 200-208/50-60/1 | 2W+G | 133 | 175 |
| 230-240/50-60/1 | 2W+G | 116 | 150 |
| 200-208/50-60/3 | 3W+G | 78 | 100 |
| 230-240/50-60/3 | 3W+G | 67 | 90 |
| 380/50-60/3 | 3W+G | 42 | 60 |
| 400-415/50-60/3 | 3W+G | 39 | 50 |
| 440/50-60/3 | 3W+G | 37 | 50 |
| 460-480/50-60/3 | 3W+G | 34 | 45 |

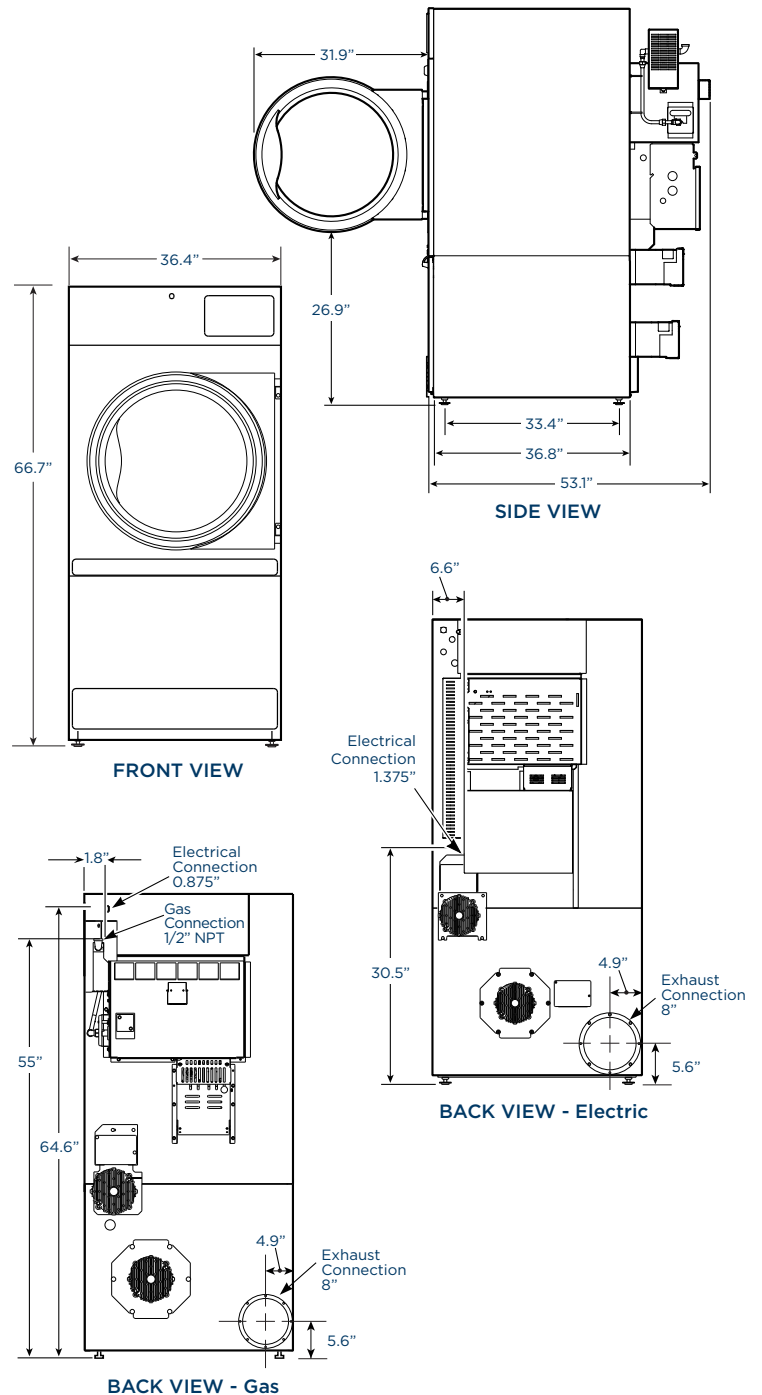

* Specifications subject to change without notice or obligation.
Contact Continental Girbau at (800) 256-1073 for dimensions not shown or for clarification.