

KT075+

ExpressDry+ Drying Tumbler



ARCHITECTURAL/MECHANICAL
PRODUCT SPECIFICATIONS

ExpressDry+

Inverter Drive

PRODUCT SPECS

Capacity <i>lbs</i>	up to 75
Cylinder Diameter <i>inch</i>	37
Cylinder Depth <i>inch</i>	36
Cylinder Volume <i>cu ft</i>	22.4
Net Weight <i>lbs</i>	
Gas	680
Steam	720
Crated Weight <i>lbs</i>	
Gas	870
Steam	910
Machine Width <i>inch</i>	38.625
Machine Depth <i>inch</i>	54.25
Machine Height <i>inch</i>	76.625
Door Opening <i>inch</i>	26.89
Floor to Door <i>inch</i>	30.75
Shipping Dimensions <i>inch</i>	
WxDxH	41.5 x 56.4 x 81
Exhaust Diameter <i>inch</i>	8
Exhaust Air Flow <i>cfm</i>	920
Exhaust Back Pressure (max) <i>WCI</i>	0.5
Required Makeup Air <i>sq in</i>	195
Electric Heating <i>kW</i>	36
Gas Connection <i>inch</i>	1/2 NPT
Gas Heating <i>BTU/h</i>	165,000
Gas Pressure (max/recommended/min)	
Natural Gas <i>wc</i>	10.5 / 6.5 / 5
Propane <i>wc</i>	13 / 11 / 10

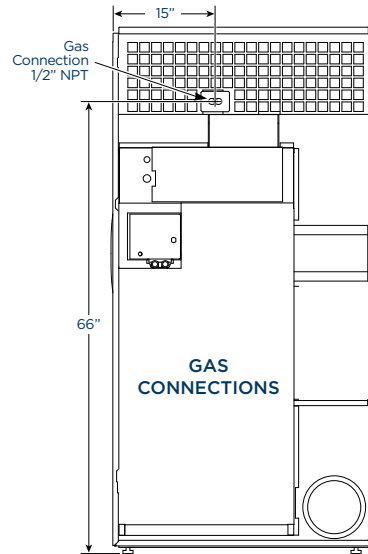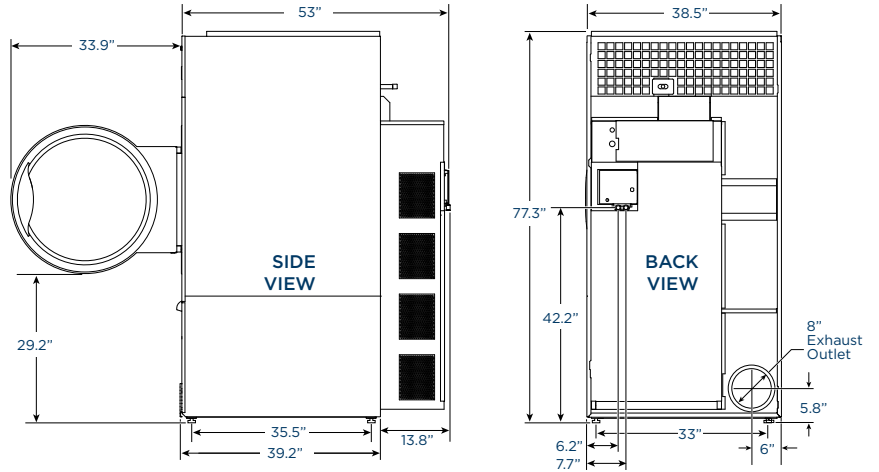


GAS MODELS

AVAILABLE VOLTAGES	WIRE CONDUCTOR	FULL LOAD AMPS	RECOMMENDED BREAKER SIZE
100-120/50-60/1	1W+N+G	12	15
200-240/50-60/1	2W+G	7	15
380-415/50-60/3	3W+G	3	15
440-480/50-60/3	3W+G	3	15

ELECTRIC MODELS - CLASSIC 36 kW

AVAILABLE VOLTAGES	WIRE CONDUCTOR	FULL LOAD AMPS	RECOMMENDED BREAKER SIZE
200-208/50-60/3	3W+G	104	150
230-240/50-60/3	3W+G	90	125
380/50-60/3	3W+G	56	70
400-415/50-60/3	3W+G	52	70
440/50-60/3	3W+G	49	70
460-480/50-60/3	3W+G	45	60

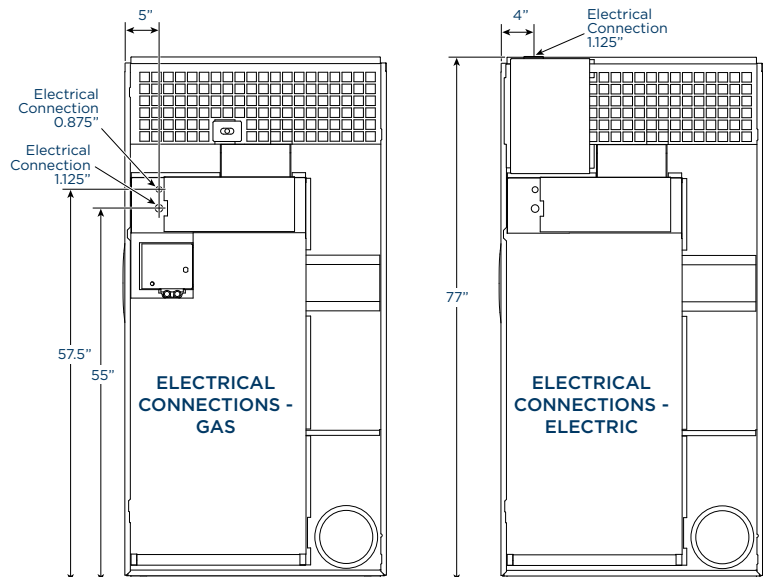

* Specifications subject to change without notice or obligation.
Contact Continental Girbau at (800) 256-1073 for dimensions not shown or for clarification.